


3M

Nib Removal Sander 3125

For wet sanding small areas

Easier to use
– great finish!

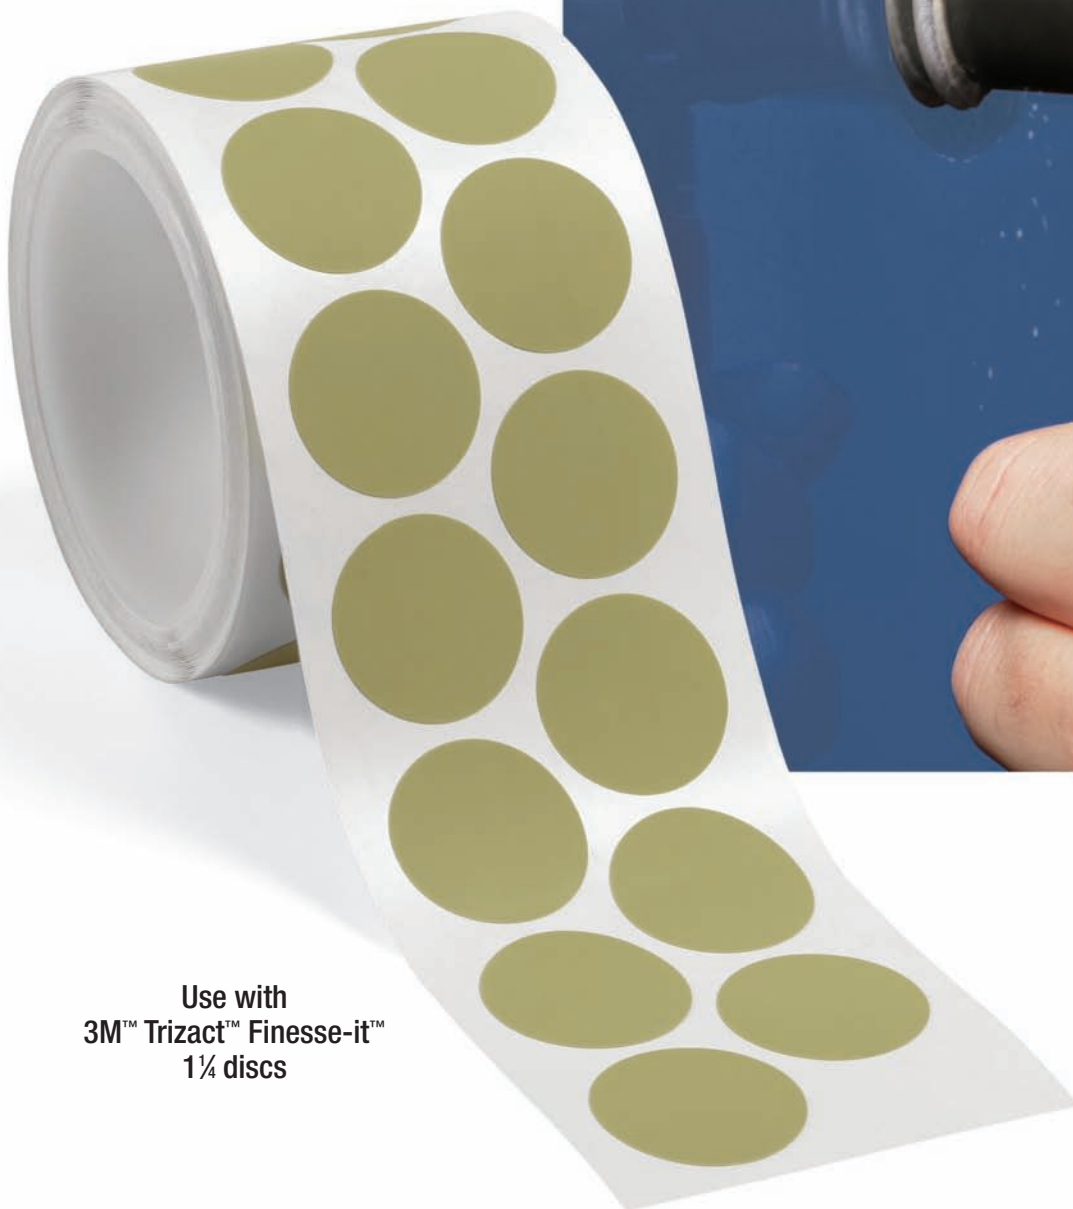

Use with
3M™ Trizact™ Finesse-it™
1¼ discs

3M™ Nib Removal Sander 3125

Light weight, easy-grip, right angle tool

The handy right-angled tool will fit your palm and allow you to keep the proper angle for a finer finish.

Better visibility, less buffing

The small, 1¼" diameter head size of the 3125 sander can help you see the exact point to sand. Plus, it produces a smaller area to buff out than conventional tools.

Precise speed control

4-position dial gives you greater flexibility, better control.

Sanding Tips and Techniques

- Use water as a lubricant during sanding.
- Spray the abrasive disc with water before and after sanding each spot to keep the disc clean and extend the life of the disc.
- Sand in a small circular motion with the pad flat against the surface.
- Keep the sanded area as small as possible.
- Use a light feathering technique to blend the repair area into original surface.
- Avoid over sanding.
- Make sure the backup pad is dry when replacing the disc.

Product	Size	Part Number	UPC
3M™ Nib Removal Sander 3125	1¼" diameter	03125	051111-60536-3

Specifications	English	Metric
Recommended air supply pressure	57~95 PSI	0.4~0.65 MPa
Motor HP	50W	0.067 HP
Rotation Speed	7,500 rpm at 85 PSI	7,500 rpm at 0.6 MPa
Maximum air flow	5.3 SCFM at 85 PSI	150 l/min rpm at 0.6 MPa
Air inlet thread	¼" PS	
Tool weight	1.05 pound	0.48 kg
Length	6½"	165 mm
Height	2 ⅞"	73 mm

Accessories	Size	Quantity	Part Number	UPC
3M™ Finesse-it™ Disc Pad – Soft	1¼" diameter	10/case	03125P	051111-60537-0
3M™ Finesse-it™ Disc Pad – Hard	1¼" diameter	10/case	03125H	051111-20207-5

PRODUCT USE: All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

WARRANTY AND LIMITED REMEDY: Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price.

LIMITATION OF LIABILITY: Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Industrial Business

Bldg. 21-1W-10
900 Bush Av.
St. Paul MN 55144

1-866-279-1235

www.3M.com/industrial

3M, Trizact and Finesse-it are trademarks of 3M.

Issued: 7/06
© 2006

5329 (HB)
61-5002-8141-7